

# WILDFIRE DOB

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

## SETUP SHEET






DRIVER \_\_\_\_\_ DATE \_\_\_\_\_

TRACK NAME \_\_\_\_\_ RESULT \_\_\_\_\_

TRACK SURFACE \_\_\_\_\_ (INDOOR/OUTDOOR) BEST LAP \_\_\_\_\_

HUMIDITY \_\_\_\_\_ TRACK TEMP \_\_\_\_\_

GRIP CONDITION HI MED LOW \_\_\_\_\_

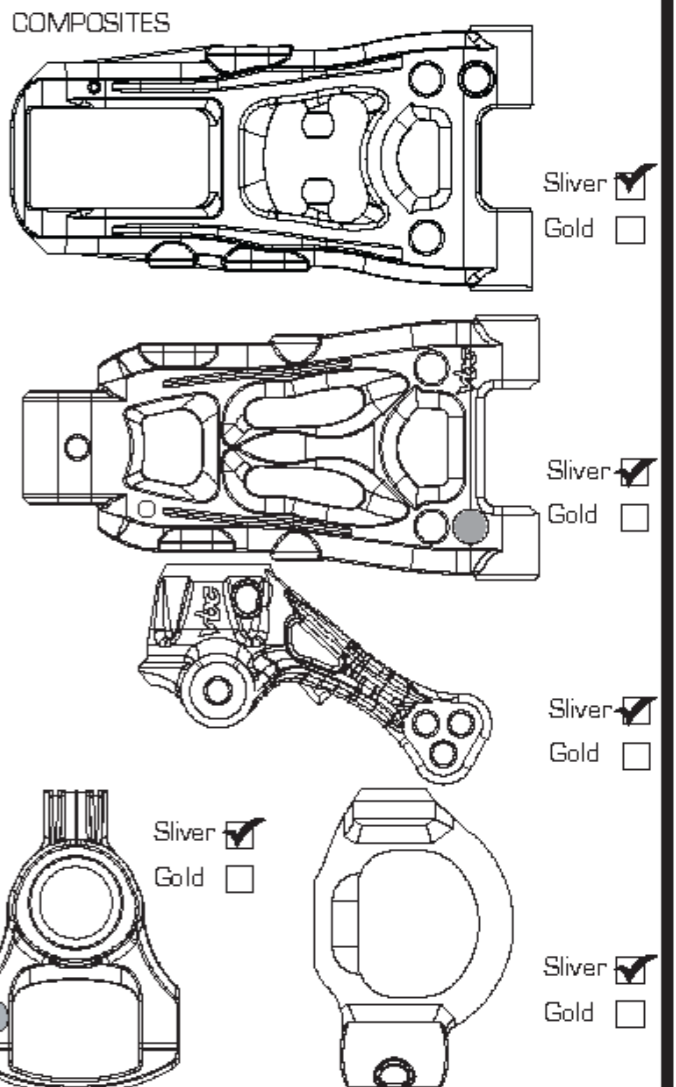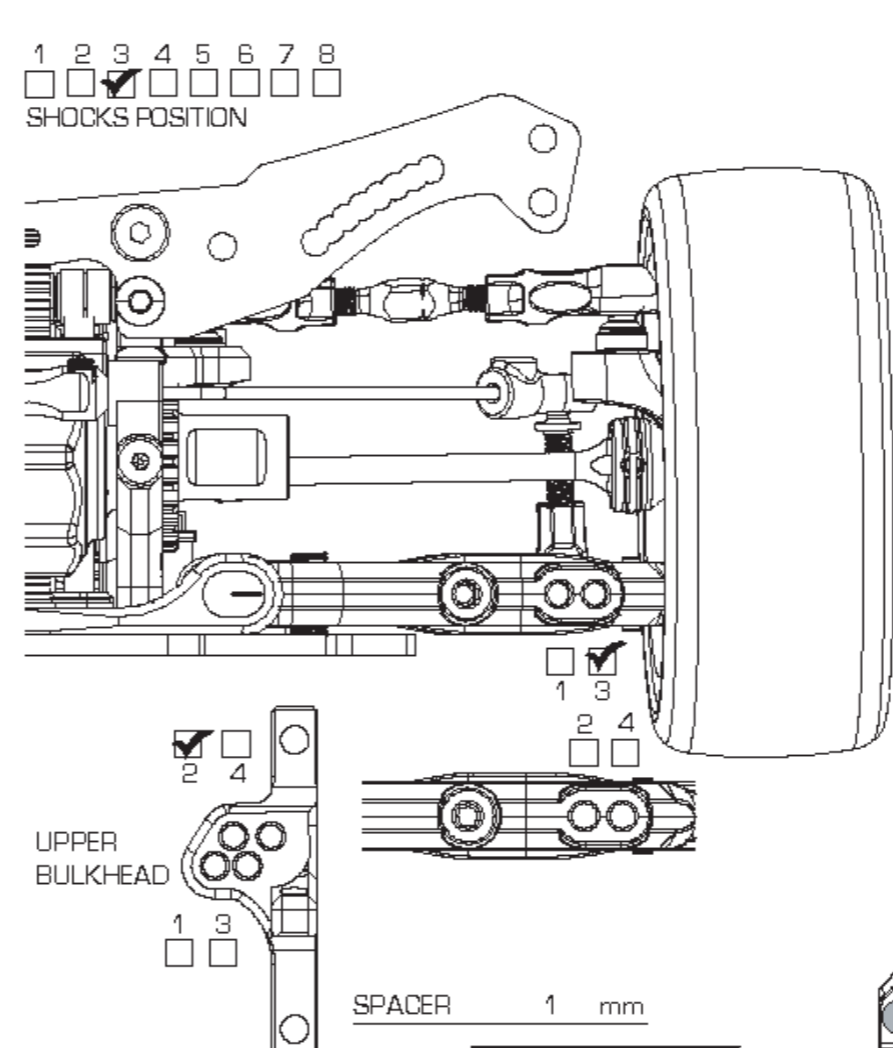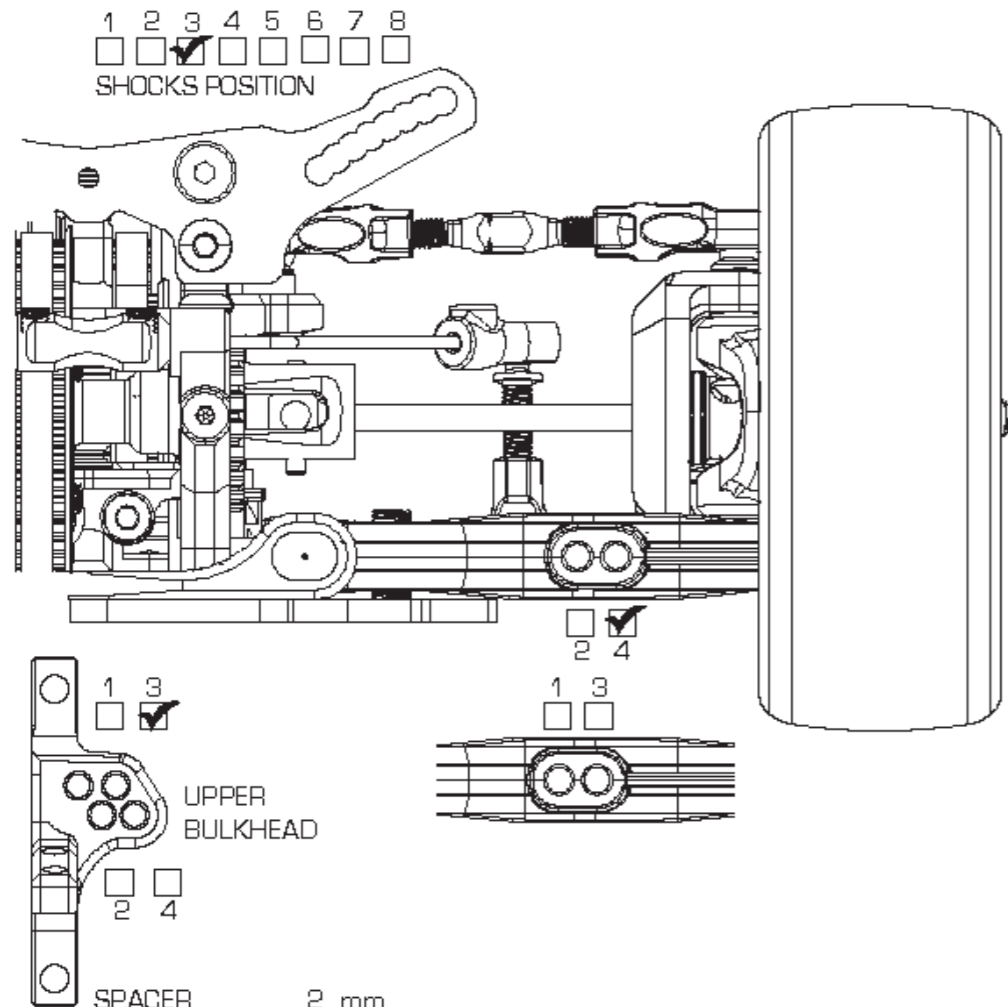


**FRONT**

GROUND CLEARANCE	5.0	mm	DROOP	5.5
CAMBER ANGLE	1.5	°	TOE ANGLE	1
CASTER BLOCK	4		FRONT DRIVE DIFF (OIL )	/ DIRECT <input checked="" type="checkbox"/>
STABILIZER	1.2	<input checked="" type="checkbox"/>	1.4	WHEEL SPACER 0 mm
SUSPENSION SHIM (FF)	0	mm	SUSPENSION SHIM (FR)	0 mm
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUM) mm			
SUSPENSION MOUNT (FF)	1		SUSPENSION MOUNT (FR)	1

**REAR**

GROUND CLEARANCE	5.2	mm	DROOP	1.0
CAMBER ANGLE	2.0	°	TOE ANGLE	3
REAR DRIVE	DIFF (OIL 1000 )		DRIVE CUP	ALUMINIUM / STEEL <input checked="" type="checkbox"/>
STABILIZER	1.2	<input checked="" type="checkbox"/>	1.4	WHEEL SPACER 0 mm
SUSPENSION SHIM (RF)	0	mm	SUSPENSION SHIM (RR)	0 mm
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUMINIUM) mm			
SUSPENSION MOUNT (RF)	1		SUSPENSION MOUNT (RR)	5

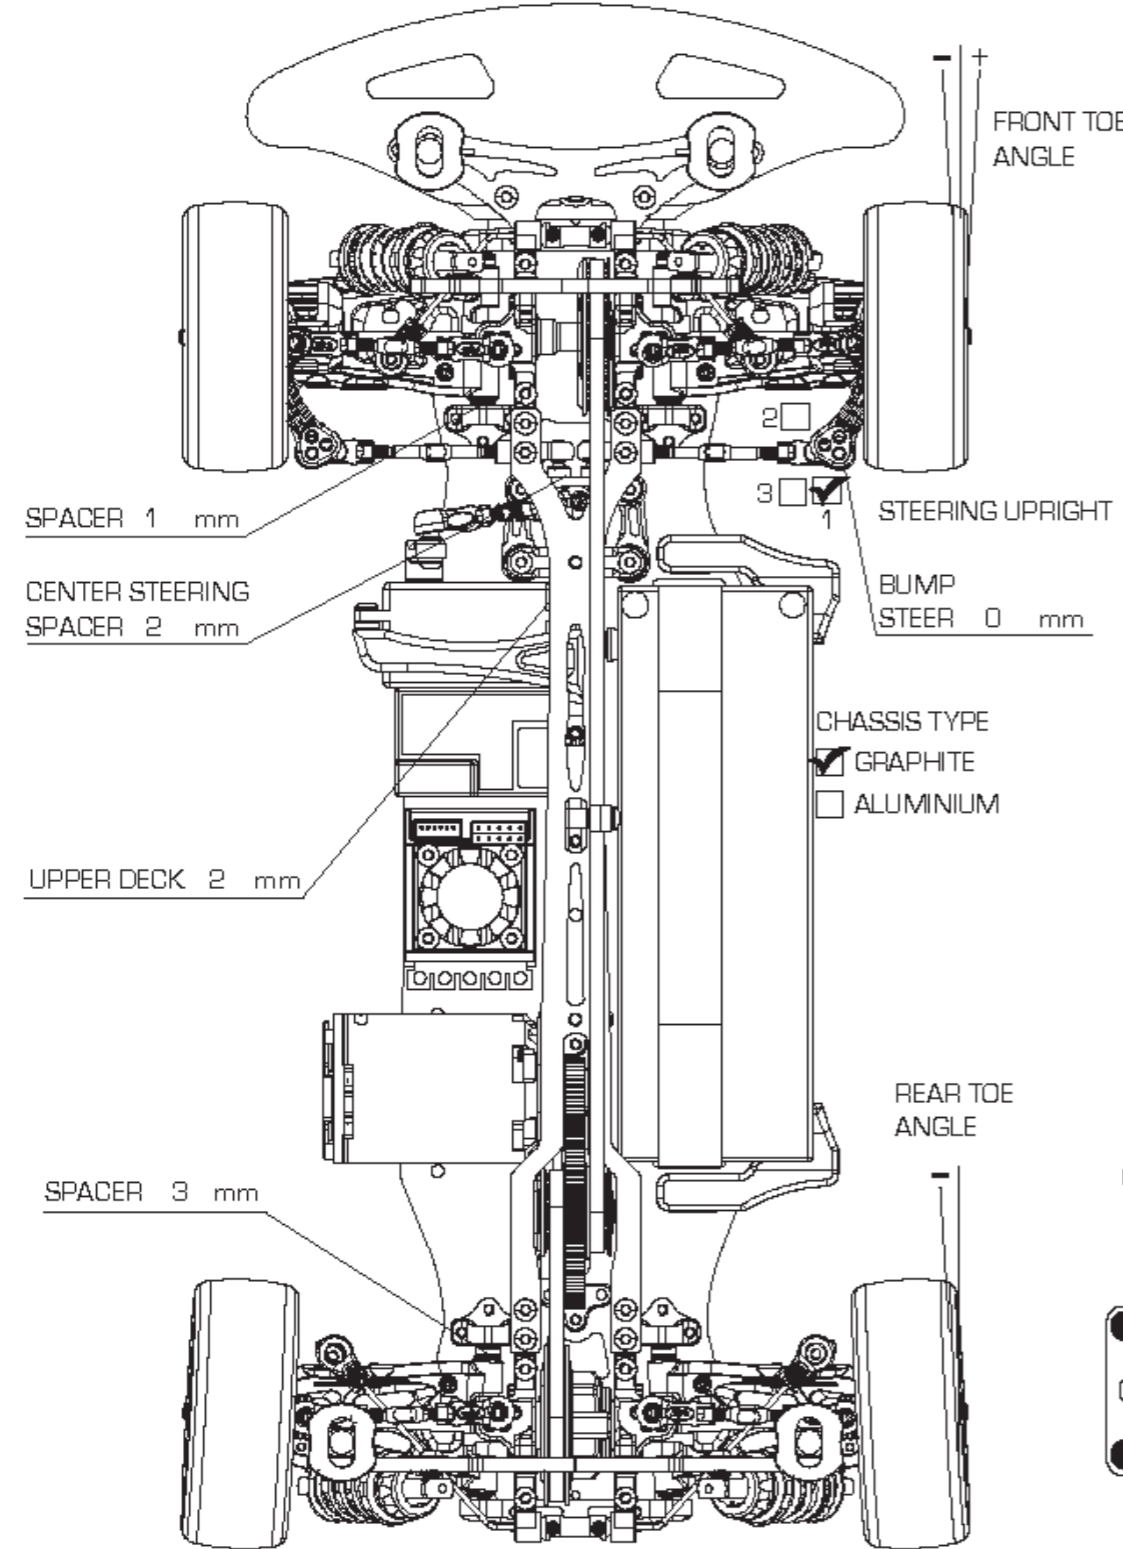


**FRONT**

SHOCK LENGTH	50.5	mm
PISTON	<input checked="" type="checkbox"/> 4 hole(s) / OTHERS	
OIL	350	
SPRING	Orange	
OIL SEALER CAP	S / MS / <input checked="" type="checkbox"/> / H	
REBOUND	10	%
NOTES		
MOTOR	SPUR	PITCH/ T
TIRE	TIRE INSERT	WHEEL
TIRE ADDICTIVE	BODY	REAR WING
ESC	BATTERY	
REMARKS		

**REAR**

SHOCK LENGTH	50.5	mm
PISTON	<input checked="" type="checkbox"/> 4 hole(s) / OTHERS	
OIL	350	
SPRING	Red	
OIL SEALER CAP	S / MS / <input checked="" type="checkbox"/> / H	
REBOUND	10	%
NOTES		
MOTOR	SPUR	PITCH/ T
TIRE	TIRE INSERT	WHEEL
TIRE ADDICTIVE	BODY	REAR WING
ESC	BATTERY	
REMARKS		

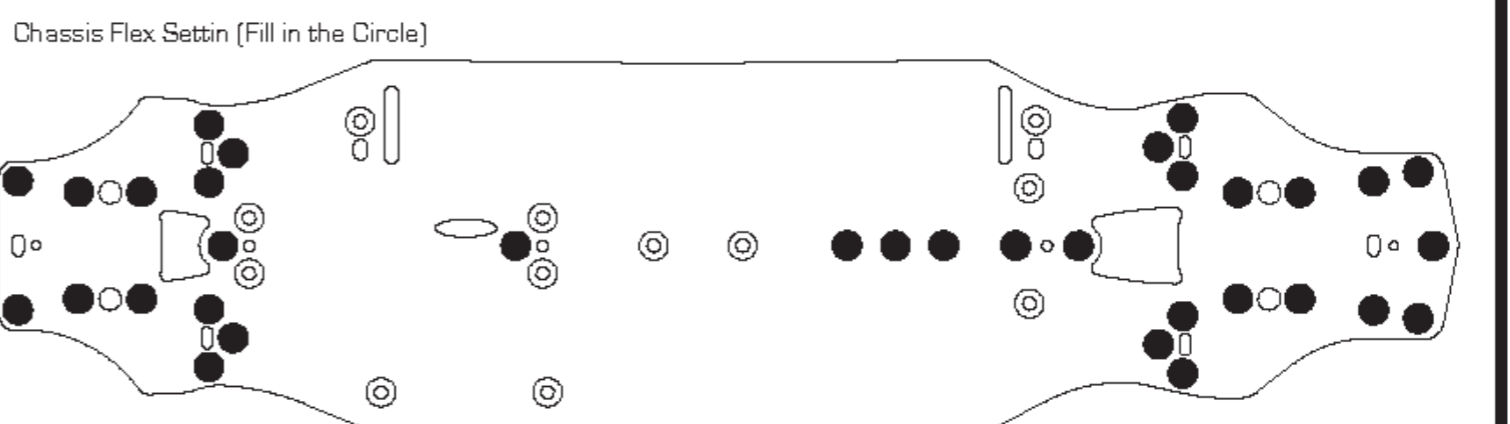

Source:

*vbc racing*

**[www.PetitRC.com](http://www.PetitRC.com)**